

**Perform high accuracy cuts on a wide range of materials.**



# Superior sharpness and extremely accurate cutting quality. Enable your multi-type-small-lot production with the CF2



\* The caster is an optional item.



## Plug-in Cutting Software **FineCut 8** for Illustrator CS5 and CorelDRAW

**All the features of CF2 series are fully utilized!**  
By making spline approximation outputting of Bezie Curve, the head moves at a constant speed and cutting can be made smoothly at connecting parts. Hard materials or thick materials can be cut by setting the number of cutting time, speed and pressure to one cut line. The tiling function makes it possible to perform divisional cutting of lengthy material.

Using register mark making function, 4 square register marks are made.

print

Square register marks are read and the cutting is made with CF2.

cut

completion




### workflow

**Linked with inkjet printer. A screen-less, die-less on-demand system.**


#### CF2-T/TF/RT Series



Mac/Win  
CorelDRAW / Illustrator /  
CAD software / FineCut 8



UJF-706 or  
other printers



FineCut 8 /  
CAM LINK /  
CF2 Series


**DESIGN**

**PRINT**


**CUTTING**



Mac/Win  
CorelDRAW / Illustrator /  
FineCut 8



JFXplus Series or  
other printers



FineCut 8 /  
CF2 Series

#### CF2-TD/RC Series



**CF2**  
Series


**CF2-T/TF/RT Series**

**Use extensively with a variety of industrial materials such as various kinds of rubber, resin, and so on.**


- Capable of performing on-demand production responding quickly even to an order as small as 1 piece.
- You can perform from sample making to short-run production, as you like.
- The mark sensor function enables you to make accurate contour cutting of printed media.
- Depending on ideas, you may produce innovative value-added products.




Joint sheet

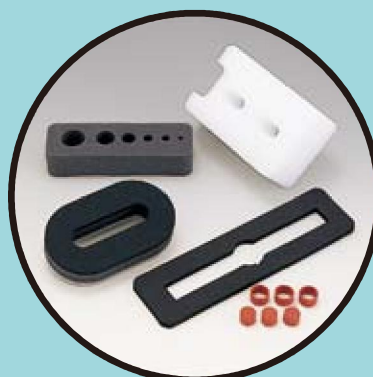

Foamed material

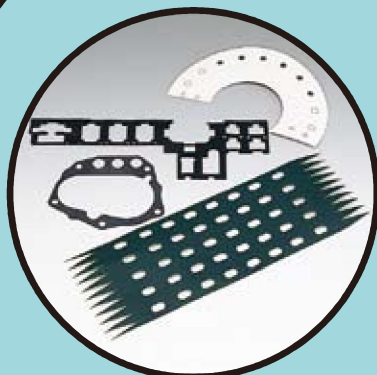

Plastic belt and others

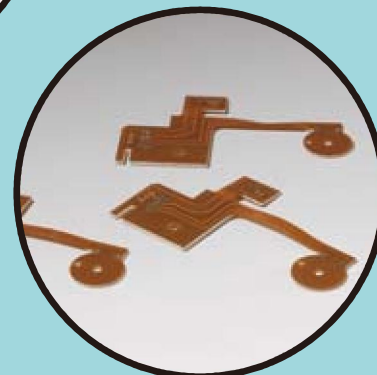

FPC board




Laminated POP



Life-size panel

#### RT head ( electric reciprocating cutter )

By reciprocating the cutter up and down at high speed, even thick material of up to 20 mm can be cut. Up to 10 mm thick, you can cut while pressing materials. Various material such as foamed material including sponge can be cut.



**Even complicated shapes and various materials can be cut.**

Various industrial materials can be cut with a variety of cutters.



#### ■ TF head



#### ■ RT head



Material -holding unit (detachable)

#### ■ Head composition

Head	Tool	Pressure	remarks
T	A Pen / swivel cutter	20 - 400 g	
	B Tangential cutter	300 - 1,500 g	
TF	A Pen / swivel cutter	20 - 400 g	
	B Tangential cutter	300 - 1,500 g	
	C High-pressure tangential cutter	1,000 - 5,000 g	
RT	A Pen / swivel cutter	20 - 400 g	
	B Reciprocating cutter	1,500 g fixed	Stroke 5 mm, Max. vibration 5,000 times
	C Tangential cutter	300 - 1,500 g	

# CF2 Series

# CF2-TD/RC Series

**Actively used for small lot commercial production of decorated cases, displays, POP, etc.**

- Possible to perform an on demand production quickly responding to an order even as small as 1 piece.
- You can perform from sample making to short-run production, as you like.
- Mark sensor function enables you to make precise contour cutting of printed materials.
- Creasing tool produces optical creases in carton and corrugated board.




Coated board



Toys



Sign board

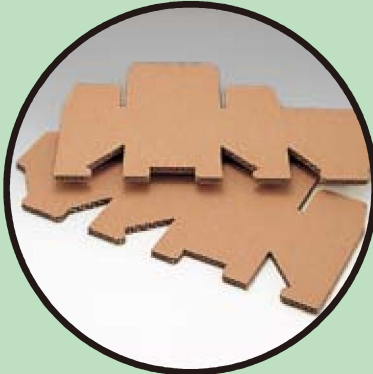

Double-faced corrugated board



Decorated case

## Thick material is cut with RC head.

By reciprocating the cutter up and down at high speed, even thick material can be cut. The material that can be cut has been further extended including double-faced corrugated board.



## Mark chips enable to cut from the back surface.

By attaching special mark chips, it is possible to perform cutting, drawing of ruled lines and folding lines from the back surface. The mechanism is that the sensor reads the center of the chip and cut. (FineCut is used.)



## TD head



## RC head



## Head composition


	JB	5PPM	1SFTTVSF	SFNBSLT
5%	"	1FO/ TXJWFMDVUUF	- H	
	#	5BOHFOUJBMDVUUF	- H	
	\$	.BSLJOHHBVHFSPMMFS	- H	
3\$	"	1FO/ TXJWFMDVUUF	- H	
	#	3FDJQSPDBUJOHDVUUF	HGJYFE	4USPLFNN.BYJNVNWJCSBUJPO UJNFT
		5BOHFOUJBMDVUUF	- H	
	\$	JHIQSFTTVSFUBOHFOUJBM DVUUF\$SFBTJOHUPPM	- H	

The CF2 Series flat bed cutting plotter capable of cutting various kinds of media with high accuracy without dies. Out of a total of 30 kinds of line-up, you can choose the one best suited for your needs. By cutting the printed media, you may produce high value-added products on demand required. Begin multi-type small-lot production with unprecedented high quality.

## Composite materials etc. can be half-cut.

### Half-cut


By adjusting the depth of the cutter blade, you can half-cut composite, laminated material (etc). As two tools can be used, you can perform different types of half-cutting or die-cutting without changing the tools.

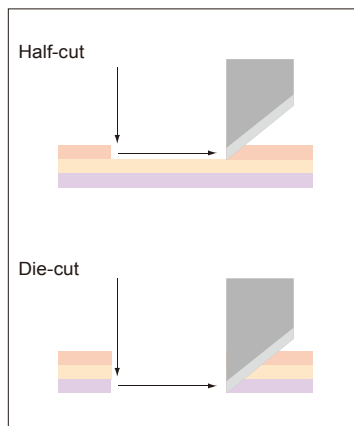

## Thick material can be outline-cut with high accuracy.

### Mark-sensor function

With the adoption of a high performance color photo sensor, the square register marks printed on the media are detected and the position of the origin, inclination of coordinate and distance are adjusted. This enables the operator to perform cutting at the precise position. Further, the sensor recognizes the difference of "color of media" and "color of square register marks", and enables the cutter to perform cuts accurately, while being tailored to the printed material without being influenced by the color of the media. A light pointer that is used as marker when setting the media is provided as standard device and facilitates position adjustment with square register marks.




## Media is set easily and accurately.

With the aid of a work-guide installed to the directions of X and Y, the positioning of the media is smooth and working efficiency has been improved. It is also possible to remove the work-guide depending on the media size.

- 1: Effective range of cutting
- 2: Media
- 3: Work-guide plate
- 4: Origin seal
- 5: Work-guide pin

\*For models with sensor, work-guide plate is used instead of work-guide pin. \*Please note that the work guide is used just as a guide for setting the media and it is not intended to guarantee the distance to the origin.

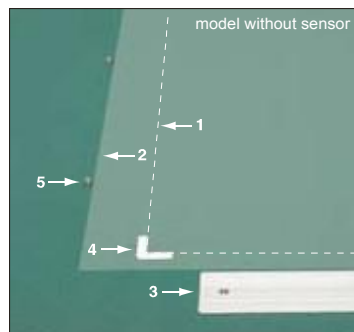

## Extensive line-up of cutter blades.

A wide variety of cutter blades tailored to various media are provided. As one machine can process with flexibility, expand your business opportunities.

### Cutter blades in the marketplace can also be used.


As the low cost cutter blades can be used, the running cost can be reduced.



## Full of useful functions to support cutting

### Correction of starting and ending points

The starting and ending positions of cutting are corrected, which makes cut-away of the media smoother. Adjustable within the range of 0 to 2.5 mm.



### press correction


Pressure of tool coming down is corrected to ensure complete cutting.

### back cutting

Back cutting is also possible by attaching mark chips to the back surface. From the front surface, excess cut is not seen making the finish beautiful.

### Circle B correction

Declination of starting point and ending point of a circle cutting caused by thickness or hardness of the media is corrected and cutting nearly perfect circle is available.



### Repeated cutting

Is capable of repeating the cutting up to maximum of 5 times changing the cutting pressure. With only one time of data sending, you can cut even thick material with high quality finish.

### Multiple registration of cutting conditions

Cutting conditions such as pressure, speed, correction of starting and ending points, circle B correction, offsets, etc. by tool may be registered for multiple times.

• Provided with felt mat required when reciprocating cutter is used.

• Various holders are available to meet a variety of materials.

• Provided with a blower to hold down materials.



\* Provided with CF2-RC/RT as standard items.

\* Enhanced blower is also available as option.



## CF2 series specifications

			CF2-0912_	CF2-1215_	CF2-1218_
Effective plotting area	X	Sensor model	1,170 mm (46.1 ")	1,470 mm (57.9 ")	1,770 mm (69.7 ")
		No sensor model	1,200 mm (47.2 ")	1,500 mm (59.1 ")	1,800 mm (70.9 ")
	Y		900 mm (35.4 ")	1,200 mm (47.2 ")	
Motorization			X,Y,Z,B 4 axes DC software servo		
Maximum plotting speed			50 cm (19.7 ") / s		
Maximum acceleration			0.5 G		
Mechanical resolution			X:0.00234 mm (0.00009 ") Y:0.003125 mm (0.0001 ") M:0.05625		
Command resolution			0.025 mm (0.001 ") / 0.01 mm (0.0004 ") ⚡ changeable from operation panel)		
Static accuracy **	Repetition accuracy		± 0.1 mm (0.004 ")		
	Distance accuracy		± 0.1 mm (0.004 ")dz or ±0.1 % whichever is greater		
	Origin repetition accuracy		± 0.1 mm (0.004 ")		
Maximum thickness of set work			T / TD1 25 mm (1 " RT / RC1 20 mm (0.8 ")		
Work fixation			Air suction by a blower		
Receiver buffer size			1MB		
Command			MGL-⚡ c3 (Support MGL-⚡ c)2		
Interface			RS-232C		
Dimension	Width		1,760 mm (69.3⚡ ") or less	2060 mm (81.1 ") or less	2360 mm (92.9 ") or less
	Depth		1,600 mm (63.0 ") or less	1900 mm (74.8 ") or less	
	Height		1,100 mm (43.3 "dz or less		
Weight			140 kg (308 lbs.)	165 kg (364 lbs.)	180 kg (397 lbs.)
Operation environment			Temperature:5 ~ 40 °C Humidity: 35 ~ 75% (Rh)No condensation		
Power requirement			Main Unit: 50 / 60 Hz AC 100 / 120 / 220 / 240 V (tap changingdz Blower: Stated separately		
Power consumption			Main Unit: 300 VA Blower: Stated separately		


\*1 Accuracy written with a pen where the load is almost non-existent. Guaranteed temperature range is 20 to 25 °C. \*2 A command based on HP-GL.

## Materials that can be processed

	T	TF	RT	TD	RC
Corrugated fiberboard $\frac{1}{2}$ E to B fluteddz				×	×
Corrugated fiberboard $\frac{1}{2}$ AB fluteddz					×
Coated board for packaging*				×	×
Vinyl chloride for clear package*				×	×
Plastic corrugated fiberboard				×	×
Vinyl chloride sheet for signboard	×	×	×	×	×
Soft vinyl chloride $\frac{1}{2}$ 0.5 to 10 mmdz	×	×			
Reflecting sheet	×	×	×	×	×
Sand-blast rubber	×	×	×	×	×
Industrial sheet rubber $\frac{1}{2}$ 3 mm or lessdz	×	×	×	×	×
Industrial sheet rubber $\frac{1}{2}$ 0.5 to 10 mmdz	×	×			
Pattern Happort	×	×	×	×	×
Teflon $\frac{1}{2}$ 1.0 to 5.0 mmdz		×		×	×
Resin belt. $\frac{1}{2}$ 5.0 mm or lessdz	×	×			
Various foam $\frac{1}{2}$ 20 mm or lessdz			×		

NotedzAs the property of the media may vary depending on the material manufacturers, the above data is just a guide. Make sure to perform your own testing. J Notedz\* shows material to which drawing of the ruled line is possible.

## Size variation

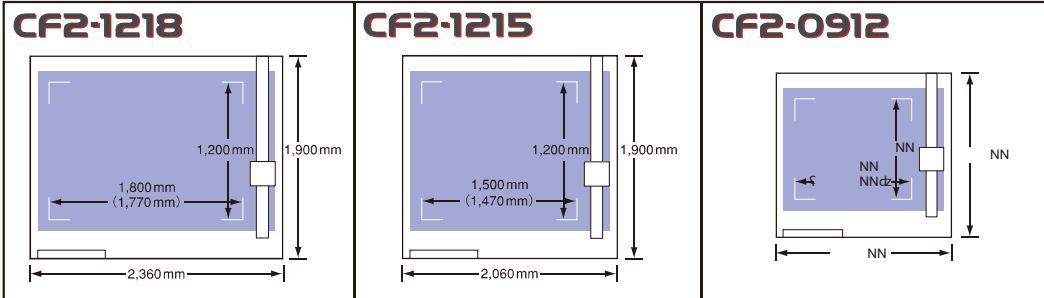


\*Please install this unit confirming that there is a space of 1,000 mm or more around the unit.

## Optional supply items/Standard accessories

Item	Item.No	T	TF	RT	TD	RC	3FNBSL
Swivel cutter holder	SPA-0001	×	×	×	×	×	1 pcs / set No blade
Swivel Blade for vinyl sheet	SPB-0001	×	×	×	×	×	3 pcs / set
Swivel Blade for small letters	SPB-0003	×	×	×	×	×	3 pcs / set
Swivel Blade for rubber sheet	SPB-0005	×	×	×	×	×	3 pcs / set
Swivel Blade for reflecting sheet	SPB-0006	×	×	×	×	×	2 pcs / set
Swivel Blade for fluorescent sheet	SPB-0007	×	×	×	×	×	3 pcs / set
Cutter holder 4N	SPA-0053	×	×	×	×	×	For works of which thickness is 5 mm or less
Cutter holder 2N	SPA-0113	×	×	×	×	×	For works of which thickness is 2 mm or less
High-speed steel blade 30 °	SPB-0043	×	×	×	×	×	40 pcs*5 / set
Carbide blade 30 °	SPB-0045	×	×	×	×	×	1 pcs*3 / set
Titanium-coated blade 30 °	SPB-0047	×	×	×	×	×	1 pcs / set
High-speed steel blade 45 °	SPB-0044	×	×	×	×	×	40pcs*5 / set
Carbide blade 45 °	SPB-0046	×	×	×	×	×	1 pcs*3 / set
Titanium coated blade 45 °	SPB-0008	×	×	×	×	×	1 pcs / set
Cutter holder 7N	SPA-0054	×	×	×	×	×	For works of which thickness is 7 mm or less
High-speed steel blade 30*7 mm	SPB-0048	×	×	×	×	×	15 pcs*5 / set
Cutter holder 10N	SPA-0077	×	×	×	×	×	For works of which thickness is 10 mm or less
Carbide design blade 30 °	SPB-0051	×	×	×	×	×	3 pcs / set
Cutter holder RN	SPA-0055	×	×	×	×	×	
Titanium coated both blades	SPB-0009	×	×	×	×	×	1pcs / set For reflecting sheet
Cutter holder JN	SPA-0061	×	×	×	×	×	
Carbide both blades	SPB-0031	×	×	×	×	×	2pcs / set For joint sheet
Cutter holder 06	SPA-0099						
Carbide blade 2 °	SPB-0064		×				5 pcs / set For sponge 20 mm or less.
Cutter holder 07	SPA-0114					×	
20 mm blade	SPB-0055				×		10 pcs / set For corrugated fiberboard
Carbide blade 17 °	SPB-0065				×		5 pcs / set For AB corrugated fiberboard
Cutter holder 08 × 15	SPA-0170			×	×	×	
Carbide blade 7 × 15	SPA-0075					×	5 pcs / set for rubber 15 mm or less
Creasing roller DN	SPA-0056			×	×		For E corrugated fiberboard
Creasing roller CN	SPA-0057				×	×	For coated board
Creasing roller PN	SPA-0058				×	×	For pleated works
Creasing plate EN	SPA-0067				×	×	For E / B corrugated fiberboard
Creasing plate YN	SPA-0124				×	×	For corrugated fiberboard in general
Pen holder	SPA-0068	×	×	×	×	×	1 pcs / set
Vacuum unit	OPT-C0199	×	×	×	×	×	120 V, 0.51 / 0.7 kw, filter separately available
Vacuum unit	OPT-C0200	×	×	×	×	×	220 V, 0.51 / 0.7 kw, filter separately available
Vacuum unit	OPT-C0201	×	×	×	×	×	240 V, 0.51 / 0.7 kw, filter separately available
Vacuum unit	OPT-C0205	×	×	×	×	×	120 V, 0.51 kw, filter separately available
Vacuum unit	OPT-C0206	×	×	×	×	×	220 V, 0.25 / 0.38 kw, filter separately available
Vacuum unit	OPT-C0207	×	×	×	×	×	240 V, 0.25 / 0.38 kw, filter separately available
Blade tip adjuster	OPT-C0030	×	×	×	×	×	For tangential cutter. Dial type
Blade tip adjuster	OPT-C0066	×	×	×	×	×	For swivel cutter. Dial type

## Line-up

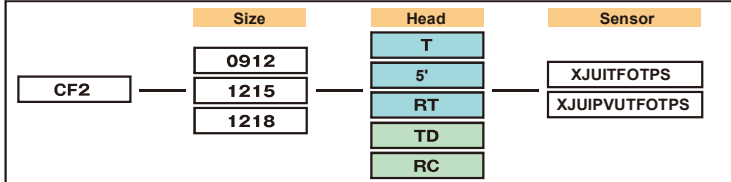

**custom** We are prepared to make special equipment meeting your special application requirements. Please consult with our sales.

- All trademarks or registered trademarks are the property of their respective owners. - Specifications are subject to change without notice. - Some of the screens and printing samples in this catalog are artificial renderings.



Our factory is certified according to ISO14001:2004

## MIMAKI ENGINEERING CO., LTD.

2182-3 Shigeno-otsu, Tomi-city, Nagano 389-0512 , Japan  
Tel: +81-268-78-2288  
trading@mimaki.jp www.mimaki.co.jp

## KHA LOI CO., LTD

Address: 65 Street No. 25, Ward 12, Go Vap District, HCM city  
Tel: +84 8 66 843 956 +84 8 62 895 195 Fax: +84 8 62 895 194  
Email: kinhdoanh.khaloi@gmail.com  
Website: www.maycatdecals-laser-cnc.com